
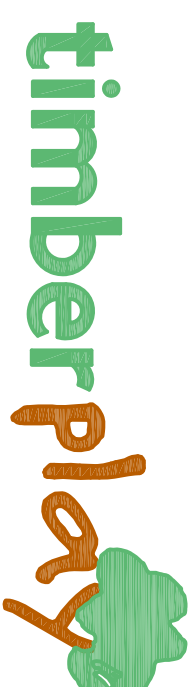


• Ground plan, scale 1:200

--- Falling space according to EN standard



• Equipment

- | | |
|----|---|
| 1 | E6.50000 Timberwood Tangle - Type 1 |
| 2 | 6.14500 Nest Swing |
| 3 | 6.26503 Standing Carousel |
| 4 | Stepping Logs x 16 |
| 5 | Relocated Toddler Slide Unit |
| 6 | Relocated Mushroom Seats |
| 7 | Silver Birch Trees x 5 |
| 8 | Bark Mulch Planter Dressing |
| 9 | Timber Sleeper Wall Seating |
| 10 | Woodfibre Cushionfall Pit |
| 11 | Existing Multipity Unit |
| 12 | Existing Toddler Swings |
| 13 | Existing Swings |
| 14 | Existing Thinned-out Planters |
| 15 | Existing Benches |
| 16 | Modified Existing Arbour |
| 17 | Existing Tyre See-saw |
| 18 | Self closing gate with maintenance access x 2 |

London Borough of
HammerSmith and Fulham

Project
Margravine Park
Revision 4

Equipment
Richter Spielgeräte GmbH
Copyright 2006
Combination
Ground plan

1:200 @ A3
15/01/10 CR
Page: 1-1

Important note for customers!
The contractor has to check on site if all conditions (required space existing space etc.) for the installation of the equipment are ensured, also supply pipes (in ground or overhead cables) and other conditions have to be observed.

Recommendation for the installation of slides:
Do not install slides with sliding direction between southeast and southwest, because of heating up the material - if it is not possible, shading of the slide has to be ensured by suitable means.

COPYRIGHT:
All rights to the design and equipment lie with timberplay Ltd. and Richter Spielgeräte GmbH