

and pavements form a neutral backcloth to the building within the conservation area.

**6.40** Footpaths should be of uniform materials, ideally traditional, which are visually distinguishable from the road surface (which should ideally be black, unless original cobbles or setts exist) and visually subordinate within the townscape providing a coherent character throughout the conservation area.

**6.41** All original granite kerb stones and areas of historic stone paving should be kept if practicable where it forms part of a significant composite scheme. Ideally new paving should be rectangular and not square, and if not york stone at least of the same colour.

**6.42** Tactile surfaces are not always appropriate in conservation areas. Where they are absolutely necessary (i.e. at controlled crossings such as zebra and pelican) they need to be of contrasting colour for safety reasons. However we will not install them anywhere else.

**6.43** Any highway management scheme's should be of sympathetic materials which relate to their surroundings and are properly 'joined' to the surrounding footpaths/roads and take into account where practical English Heritage guidelines for conservation areas.

### **Open Spaces**

**6.44** There are no public open spaces in the conservation area. It derives its character from the hard edges created by the terraced frontages set behind the shallow front garden areas.

### **Trees**

**6.45** There are significant mature street and private trees of value to the townscape in the conservation area. All trees in a Conservation Area, including those in rear gardens, are protected. Owners should be urged to look after trees on their land and plant new trees in order to ensure a continuing stock of mature trees for future generations.

**6.46** If resources become available in the future street trees could be considered throughout the conservation area providing underground services allow.

**6.47** A programme of planting should be initiated where appropriate to ensure there is new stock to replace existing trees in the future.

### **Street furniture**

**6.48** The conservation area would benefit from more sympathetically designed lighting columns and lanterns should the opportunity ever arise. Lighting furniture could be improved along the river front and reviewed elsewhere.

**6.49** Careful consideration should be given to the number and location of street signs so as to avoid clutter. These should be reviewed with a view to reducing the number of columns by fixing signs to lamp posts etc.

**6.50** Any remaining cast iron street name plates should if possible be retained.

### **Opportunity Sites**


**6.51** Opportunity sites are sites where visual improvements are desirable and could be achieved through redevelopment or refurbishment. There are no opportunity sites in the conservation area at present.

**6.52** Redevelopment should be judged against criteria suitable for a conservation area, in which new buildings should contribute positively to the visual quality of the area, respecting the dominant pattern of development in terms of plan form and height of the townscape.

### **Public Houses**

**6.53** Where an original shopfronts or pub facades has already been partially removed, any surviving original ornaments and architectural features should be retained. Any new shopfronts should be carefully designed to incorporate the remaining traditional features.

**Sketch showing good practice and inappropriate alterations to a property within the conservation area**

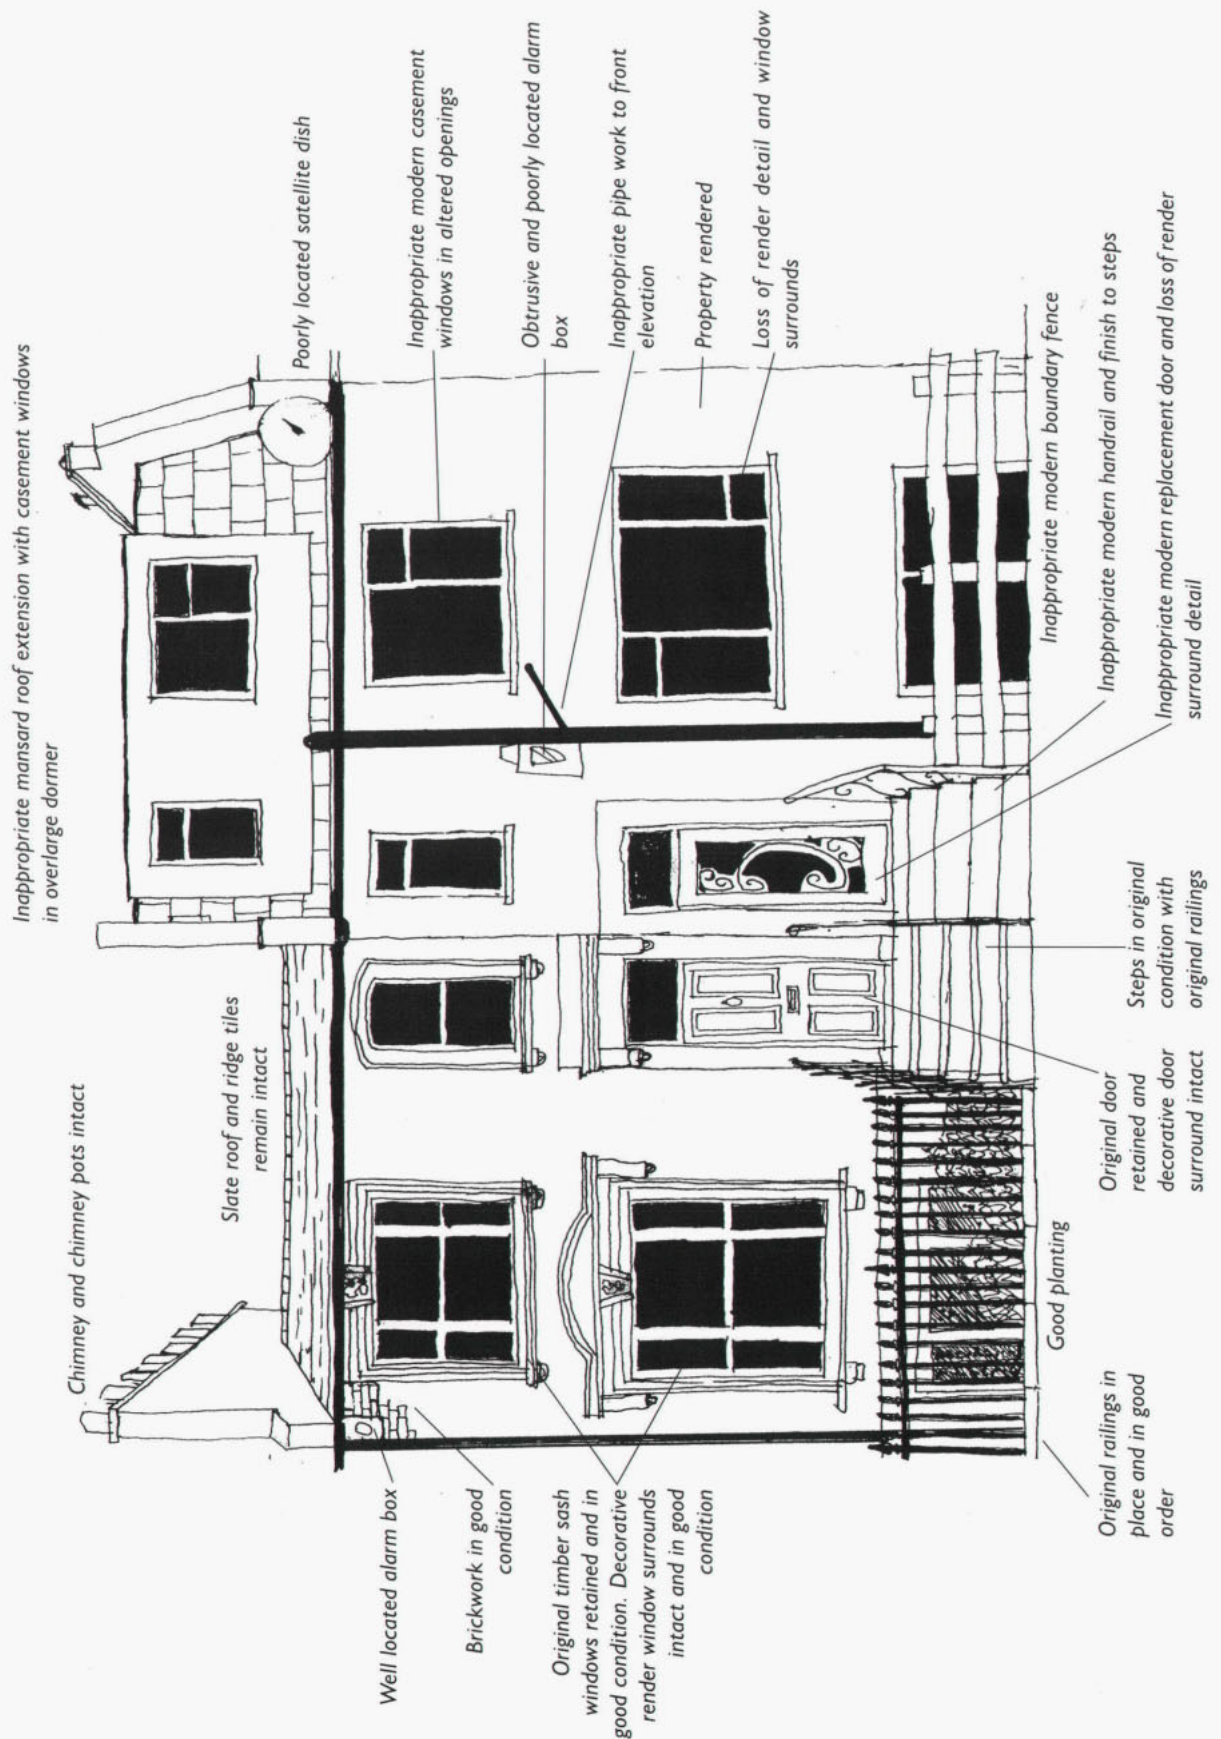



## **Signs**

**6.54** Internally illuminated box fascias should not usually be permitted where they are not sympathetic to the conservation area. Individually illuminated letters or neon words are preferred. Any type of internally illuminated signs should be carefully integrated into the shopfront as a whole.

**6.55** Consent should not usually be granted to install internally illuminated box signs. Traditional hanging signs are preferred, located in such a position as to avoid damage to original features.

**6.56** Security grilles where absolutely necessary should be open mesh and ideally located internally. Solid shutters should be resisted except where the window display remains visible and door only is shuttered; the shopfront is an open type e.g. greengrocers.

**6.57** Where canopies are required they should be straight canvas canopies capable of full retraction.

**6.58** Architectural details should not be obscured or removed and care should be taken to ensure that size, shape and position of canopies are appropriate to the building.

## **7 OTHER RELEVANT DOCUMENTS**

---

The Unitary Development Plan; London Borough of Hammersmith and Fulham, adopted December 1994.

Department of the Environment/Department of Heritage; Planning and the historic environment PPG 15, September 1994.

Conservation Area Practice, English Heritage guidance on the management of conservation areas; English Heritage, June 1993.

## **8 LISTED BUILDINGS IN THE CONSERVATION AREA**

---

There are no listed buildings in the conservation area at present.

## **9 BUILDINGS OF MERIT IN THE CONSERVATION AREA**

---

All properties in the Conservation Area other than Walham House

## **10 ARTICLE 4 DIRECTIONS IN THE CONSERVATION AREA**

---

Planning permission is needed for most forms of development, including many building alterations. But in order to prevent unnecessary interference in more straightforward work the "Town and Country Planning (General Permitted Development) Order 1995" grants a general planning permission for some types of development, including some alterations to dwellinghouses. Because even these more simple developments can harm the character and appearance of a conservation area, Local Planning Authorities can remove these permitted development rights. This is done by the council making a Direction under Article 4 of the General Permitted Development Order.

### **South side of Walham Grove**

Nos. 27-58 (consec.)

Planning permission is required for:

The enlargement, improvement or other alteration of a dwelling house insofar as such development would alter the external appearance of the dwelling house;

The erection or construction of a porch outside any external door at the front of a dwelling house;

The erection, construction, placing, maintenance or improvement or other alteration within the front curtilage of a dwelling house of any building or enclosure insofar as such development would alter the external appearance of a dwelling house;

The construction within the front curtilage of a dwelling house of a hardstanding for vehicles;

The erection or placing within the front curtilage of a dwelling house of an oil storage tank;

The erection, construction, maintenance, improvement or other alteration of any gates fences walls or other means of enclosure situated at the front of land;

The painting of unpainted brickwork on the exterior frontage of any building.

#### **North side of Walham Grove**

1-16 (consec.) Walham Grove

19-26 (consec.) Walham Grove

Planning permission is required for the:

The enlargement, improvement or other alteration of a dwelling house insofar as such development would alter the external appearance of a dwelling house;

The erection or construction of a porch outside any external door of a dwelling house;

The erection, construction, placing, maintenance or improvement or other alteration within the curtilage of a dwelling house of any building or enclosure insofar as such development would alter the external appearance of a dwelling house;

The construction within the curtilage of a dwelling house of a hardstanding for vehicles;

The erection or placing within the curtilage of a dwelling house of an oil storage tank;

The erection, construction, maintenance, improvement or other alteration of any gates fences walls or other means of enclosure;

The painting of unpainted brickwork on the exterior of any building.

Please note that these planning controls are in addition to those which apply everywhere. If you need advice as to what development does or does not need planning permission you should contact the Environment Department reception at the address on page 1.

## **11 GLOSSARY**

---

**Architrave** A strip or moulding used to cover the joint between a frame and a wall, as round a door or window frame; the lowest of the three sections of an entablature in classical architecture.

**Baluster** A pillar or column supporting a handrail or coping, a series forming a balustrade.

**Barge board** A board fixed to the projecting end of a roof over a gable, usually in pairs, one to each slope.

**Bays** Compartments into which the nave or roof of a building is divided. The term is also used for projecting windows.

**Bow window** Similar to a bay window but curved in plan.

**Bracket** A projecting support. In brickwork or masonry it could be called a Corbel.

**Building line** The main mass of a building as defined by its facades.

**Canopy** A roof-like projection over a door or window; a hood.

**Capital** The head or crowning feature of a column.

**Cill/Sill** A slab of stone or wood at the base of a window or door opening giving protection to the wall beneath.

**Colonnade** A series of columns.

**Console** An ornamental bracket.

**Corbel** A projection from a wall, often in brick, iron, wood or stone, which provides support for a beam or roof truss. Sometimes decorated.

**Curtilage** The total land area attached to a dwelling house.

**Dentils** A row of small rectangular blocks forming part of the bed mould of a cornice

**Dormer** A window in a sloping roof, usually that of a sleeping-apartment, hence the name.

**Eaves** The lower part of a roof projecting beyond the face of the wall.

**Entablature** The upper part of an Order of architecture, comprising architrave, frieze and cornice, supported by a colonnade.

**Facade** The face or elevation of a building.

**Fascia** The wide board over a shop front.

**Finial** The upper portion of a pinnacle, bench end or other architectural feature.



**Gable** The triangular portion of a wall, between the enclosing lines of a sloping roof. In Classic architecture it is called a pediment.

**Glazing bar** A thin rebated wood bar which divides a large window into smaller lights.

**Hipped Gable** A roof which is hipped at the upper part of its end but has a part gable below the hip.

**Hipped Roof** A roof which is sloped at its ends as well as on the sides.

**Ionic** The Ionic order is lighter, more elegant, than the Doric, with slim columns, generally fluted. It is principally distinguished by the volutes of its capitals.

**Light** One window as bounded by the mullions and transoms and sometimes itself divided into several panes.

**Lintel** The beam spanning the opening of a window or doorway. It may be wood, concrete, stone or steel.

**Mansard roof** A roof with steep lower slope and flatter upper portion, named after Mansart. Also known as 'gambrel' roof.

**Order** An Order in architecture comprises a column, with base (usually), shaft, and capital, the whole supporting an entablature. The Greeks recognised three Orders: Doric, Ionic and Corinthian. The Romans added the Tuscan and the Composite (later known as Roman), while using the Greek Orders in modified form.

**Pantile** A shaped clay tile with a double curve across its width from concave on one side to convex on the other so that it overlaps the tile adjoining it on the side.

**Parapet** The portion of wall above the roof gutter, sometimes battlemented; also applied to the same feature, rising breast high, in balconies, platforms and bridges.

**Party wall** A wall separating two adjoining buildings and common to them.

**Pediment** In Classic architecture, a triangular piece of wall above the entablature, enclosed by raking cornices. In Renaissance architecture used for any roof end, whether triangular, broken or semicircular. In Gothic such features are known as gables.

**Pilaster** A rectangular feature in the shape of a pillar, but projecting only about one-sixth of its breadth from a wall, and the same design as the Order with which it is used.

**Porch** A roofed projecting structure to give protection against the weather to an entrance.

**Quoin** A term generally applied to the corner-stones at the angles of a building and hence to the angle itself.

**Ridge tile** A tile for covering the ridge of a roof: commonly of half-round or angular section.

**Rustication** A method of forming stonework with roughened surfaces and recessed joints, principally employed in Renaissance buildings.

**Sash** The sliding light of a sash window.

**Semi-basement** A storey set halfway below ground level below the ground floor storey of a property.

**Stock brick** The most commonly used in the district at any given time.

**Storey** The part of a building between each floor level and the floor above it.

**String course** A decorative or slightly projecting horizontal band of brickwork or stone in the external face of a wall.

**Stucco** A fine quality of plaster, much used in Roman and Renaissance architecture for ornamental modelled work in low relief. In England, it was extensively employed in the late 18th and early 19th century as an economical medium for the modelling of external features, in lieu of stone.

**Terracotta** Clay material moulded and burnt and used for features such as cornices, vases etc. Can be used with or without a glazed finish.

**Voussoirs** The wedge-shaped stones or bricks of an arch.

**Volute** The scroll or spiral occurring in Ionic, Corinthian and Composite capitals.



Design and Conservation  
Development Services Division  
Environment Department  
London Borough of Hammersmith & Fulham  
Town Hall, King Street, LONDON W6 9JU  
September 2000



INVESTOR IN PEOPLE